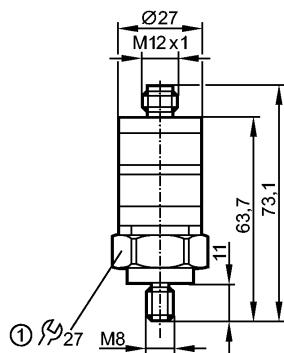


**VKV021**

VIBRATION MONITOR

Diagnostic systems

**Product characteristics**

Vibration monitor

VKV

Connection via M12 connector

Vibration monitor to DIN ISO 10816

Measuring range RMS: 0...25 mm/s

Switching output NC DC PNP and analogue output 4...20 mA

**Application**

Application Vibration monitor Vrms to DIN ISO 10816

**Electrical data**

Operating voltage [V] 18...32 DC

Current consumption [mA] &lt; 50

Protection class III

**Inputs / outputs**

Circuit 1 x normally closed DC PNP / 1 x analogue 4...20mA

Inputs / outputs total 2

**Outputs**

Digital

Output function 1 x normally closed DC PNP

Max. current load per output [mA] 500

Voltage drop [V] &lt; 2

Short-circuit protection pulsed

Overload protection yes

analogue

current output [mA] 4...20

Max. load [Ω] &lt; 500

**Measuring / setting range**

Delay [s] 1...60

Measuring range [mm/s] 0...25 RMS

Frequency range [Hz] 10...1000

**Accuracy / deviations**


Accuracy [% of the final value] &lt; ± 3

Switch point accuracy &lt; ±4

**VKV021**

VIBRATION MONITOR

Diagnostic systems

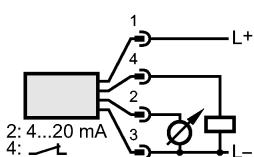Repeatability	< 0.5 %
Linearity	0.25 %
<b>Software / programming</b>	
Switch point setting	Setting ring
Switching delay	Setting ring
<b>Environment</b>	
Ambient temperature [°C]	-25...80, for UL applications: max. 80 °C
Protection	IP 67
<b>Tests / approvals</b>	
EMC	EN 61000-4-2 ESD: 4 kV CD / 8 kV AD EN 61000-4-3 HF radiated: 10 V/m EN 61000-4-4 Burst: 2 kV EN 61000-4-6 HF conducted: 10 V
Shock resistance	400 g
MTTF [Years]	510
<b>Mechanical data</b>	
Type of sensor	Microelectromechanical system (MEMS)
Number of measurement axes	1
Housing materials	PBT (Pocan); PC (Makrolon); FPM (Viton); stainless steel 316L / 1.4404
Type of mounting	M8 x 1.25
Weight [kg]	0.116
<b>Displays / operating elements</b>	
Display	Operation LED green Switching status LED yellow
<b>Electrical connection</b>	
Connection	M12 connector
<b>Wiring</b>	
1: L+	
2: 4...20 mA	
3: GND	
4: digital output (normally closed)	
	 
<b>Remarks</b>	
Pack quantity	[piece]
	1